

**RADIANT**




**LED PROFILE SERIES**




# LED Profile

**LED S-1** THE PERFECT SOLUTION FOR LOW PROFILE ACCENT, EDGE LIGHTING AND UNDER CABINET APPLICATIONS. THIS LINEAR PRODUCT USES A WHITE LED STRIP WITH 3 WATTS PER FOOT, .55 INCHES ON CENTER WITH A LINEAR SPREAD LENS. THE ENTIRE ASSEMBLY IS LESS THAN 1/2" AND IS DESIGNED WITH A EXTRUDED HOUSING THAT NOT ONLY DISSIPATES THE HEAT, BUT ALSO ACTS AS A DECORATIVE HOUSING THAT CAN BE EXPOSED IN MANY APPLICATIONS. COLOR OPTIONS ARE 33K, 47K, 57K AND 65K.

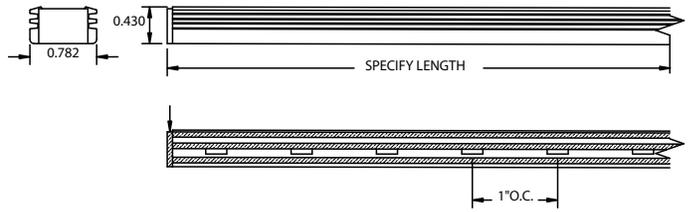

**LED S-2 AND S-2 RBG** OUR COMMITMENT TO PROVIDING LED SOLUTIONS CONTINUES WITH THE S-2 EXTRUSION. ORIGINALLY DESIGNED TO ACCEPT OPTICAL LENS ACCESSORIES FOR ACCENT AND DISPLAY LIGHTING, IT NOW IS AVAILABLE WITH NEW RBG LINEAR STRIP AND DMX CONTROL MODULE. THE ENTIRE ASSEMBLY IS UNDER 3/4" AND ITS EXTRUDED FLUTED HOUSING IS ABLE TO BE LEFT EXPOSED AS AN ARCHITECTURAL ELEMENT, OR HIDDEN WITHIN MANY APPLICATIONS THAT REQUIRE COLOR CHANGING AND OR FOCUSED LINEARLIGHT. WHITE LED ARE AVAILABLE IN 3 WATTS PER FOOT, .55 INCHES ON CENTER WITH A LINEAR SPREAD LENS. COLOR OPTIONS ARE 33K, 47K, 57K AND 65K. THE RBG UNITS ARE SPACED AT .59" ON CENTER. OPTIONAL TERTIARY 25 DEGREE OPTIC IS AVAILABLE. OPTICS OPTIONS ARE NARROW (10 DEGREES) OR MEDIUM (15 DEGREES).

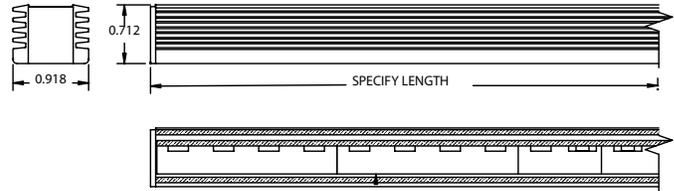

**LED S-4** THIS PROFILE ACCEPTS OUR 2 WATT LED 2" ON CENTER. WITH THE NEWEST IN LED TECHNOLOGY AS WELL AS THE ABILITY TO ACCESSORIZE THIS UNIT WITH OPTICAL LENS COMPONENTS, THIS UNIT IS PERFECT FOR WALL GRAZING APPLICATIONS. THE UNIT CAN BE ORDERED WITH A STANDARD FROSTED LENS FOR HIGH OUTPUT RETAIL DISPLAY APPLICATIONS AS WELL AS ARCHITECTURAL ACCENT LIGHTING. THE SLEEK DECORATIVE EXTRUSION IS JUST OVER 3/4" AND IS UNDER 1.5" WIDE. COLOR OPTIONS ARE 47K, 57K AND 65K. OPTICS OPTIONS ARE NARROW (10 DEGREES) OR MEDIUM (15 DEGREES).

