



## Sasso

Signal lighting fixtures

### Focus on the range

Lightweight **drive-over** lighting fixtures

Maintenance free

Slip-proof **tempered** glass

Available in **different colours**

Fixture for lightweight drive-over applications in high resistance glass that simulates the **floor stone** suitable for indoors and outdoors.

Thanks to the considerably long life of the light source (80,000 - 100,000 hours) it can be mounted directly inside masonry.

The IP68 protection level and the low supply voltage (12Vdc, two control gears are available, 15 or 50 W) allow the fixture to be installed in fountains, streams and ponds.


An electronic circuit inside Sasso guarantees total stability of the light beam (the LED is dc powered), and it is totally immune to any drops in voltage there may be along the supply cables (from 9 to 15Vdc voltage permitted without alterations to the light beam).

The fixture works with a d.c. voltage and has inverse polarity protection (it will not start if the connection is wrong), it has an input of approximately 300mA.

Sasso's electronic component is **completely** embedded in resin to ensure total waterproofness. The neoprene cable leading out can be buried with no problem.

A connecting kit is supplied with a thermoshrinking sheath (with glue inside) for quick and easy waterproof electrical connections.

**Parallel connections** are possible; with a 15 W transformer up to 4 stones can be powered, 14 with 50 Watts

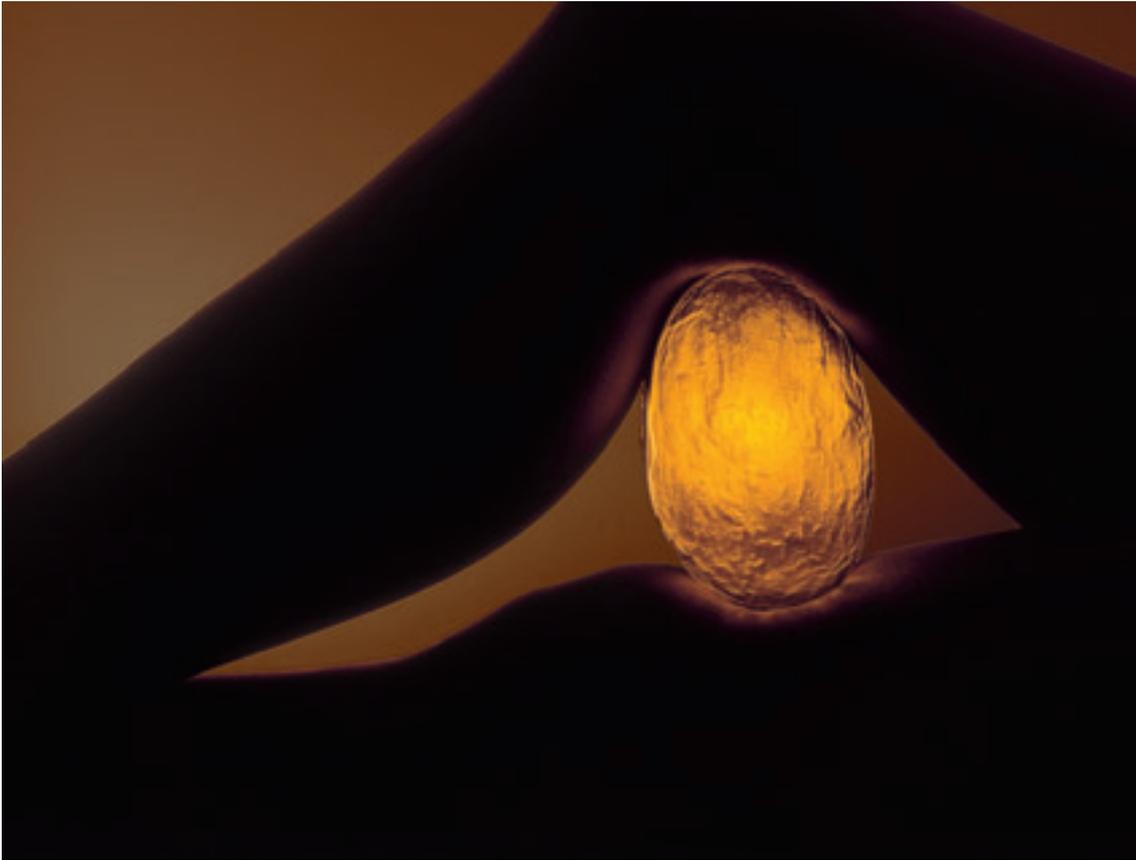


The extra **thickness** of the glass imparts considerable mechanical **resistance** to the Sasso product and is also highly shockproof.


**The d.c. supply circuit** inside the product guarantees a constant light beam regardless of the input voltage which can range between 9 and 15 Volt d.c.

The standard product cannot be connected to dimmer systems; dimmerable fixtures can be made on request however.

tempered glass LED ground signal lighting fixtures IP68 **Sasso**



LIGHT BY  
**LUXEON**



Static load **1,000 Kg**  
Maximum transit speed **30 Km/h**  
Protection against impacts **IK = 9**

**white LED, 3.6W 9+15v d.c.**  
fixture without control gear  
recessed drive-over lighting fixture 1,000 Kg  
available in five colours  
fixture **76270.00**  
control gear \_\_\_\_\_

**amber LED, 3.6W 9+15v d.c.**  
fixture **76272.00**  
control gear \_\_\_\_\_

**blue LED, 3.6W 9+15v d.c.**  
fixture without control gear  
fixture **76271.00**  
control gear \_\_\_\_\_

**green LED, 3.6W 9+15v d.c.**  
fixture **76274.00**  
control gear \_\_\_\_\_

**red LED, 3.6W 9+15v d.c.**  
fixture **76275.00**  
control gear \_\_\_\_\_


white




amber




blue



green



red



**SASSO accessories**

Control gears for Sasso fixtures



control gear IP40 15W 230/12v d.c.  
**38919.00**

Dimensions:  
130x40x30 mm

it can control up to 4 Sasso  
fixtures



control gear IP66 50W 230/12v d.c.  
**38920.00**

Dimensions:  
110x110x45 mm

it can control up to 14 Sasso  
fixtures